



PGDLS275



DOOSAN DAEWOO	Alternator:	Leroy-somer		TDA313X (Open)
Engine:		<mark>LSA46.2L9</mark>	Generator	IDAJIJA (Open)
P126TI	Optional:	Stamford HCI444D	Model:	TD A212VC (Silent)
Electrical Governor		Tide TPA314M4		TDA313XC (Silent)

60Hz	3 Phase	Power Factor:	Emissions	N/A
1800 r.p.m	4 Wires	$Cos \ \ \ = 0.8$	Certification:	

	Prim	e Power	Standby	, Power	Rated Current	
RATINGS	(H	PRP)	(L7	TP)	(A)	
Voltage (V)	kW	kVA	kW	kVA	Amps	
480/277	250	313	275	344	375.9	
440/254	250	313	275	344	410.1	
416/240	250	313	275	344	433.7	
240/138	250	313	275	344	751.8	
220/127	250	313	275	344	820.1	

RATINGS:

All three Phase generator sets are rated at 0.8 power factor. All single-phase generator sets are rated at 0.8 or 1.0 power factor. *POWERGEN* reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Prime Power:

Available continuously at variable load in lieu of commercially purchased power for an unlimited number of hours per year in accordance with ISO8528-1, and an overload of 10% permitted for one hour in every twelve hours of operation in accordance with ISO 3046-1.

Standby Power:

Emergency Standby Power in variable load applications in accordance with ISO8528-1 in the event of a utility power failure. No overload available for this service as relevant alternators are peak continuous rated at 27° C.



Standard Features

- ▲ High efficient water cooled diesel engine
- ▲ Brushless alternators (Class H, with AVR.)
- ▲ Heavy duty rubber anti-vibration mountings
- ▲ 12/24V starter batteries and connecting cables
- \blacktriangle Separate engine-drive battery charging alternator
- \blacktriangle Industrial silencer for open type generator sets
- ▲ Residential silencer for open type generator sets
- ▲ Auto start / Digital Tide Easycon Control Panel
- ▲ Wiring with IEC standard
- ▲ Factory Test Certificate
- ▲ Operation & Maintenance Manual & Diagrams
- ▲ Worldwide Product / Technical Support

- ▲ Radiator with cap and drain point.
- \blacktriangle Fully guarded engine driven fan
- ▲ Circuit Breaker 3 pole (MCCB)
- ▲ Base fuel tank for 6 8 hours running at 100% load
- ▲ Oil filter Diesel filter Air filter

 \triangle Extra air filters for time-maintenance \triangle Extra diesel filters for time-maintenance

△Extra oil filters for time-maintenance

△Full range of attachments and options available


 \triangle Separated standing fuel tank \triangle Low coolant level sensor

for alternator

- ▲ Fully welded steel baseframe with lifting and fork-lifting facilities.
- ▲ Sound proof & Weather protective enclosures for silent type generator sets.

- **Optional**
- \triangle Automatic Transfer Switch (ATS)
- \triangle Water fuel separator
- \triangle Water heater for severe cold weather
- \bigtriangleup Lub-oil heater for severe cold weather
- \triangle 50°C-60°C Radiator
- \triangle Dual wall fuel tank base
- \triangle Fuel level sensor
- \triangle Maintenance free battery
- \triangle Additional **CE Features** Selection

Overall Dimensions (mm) & Weight (kg)

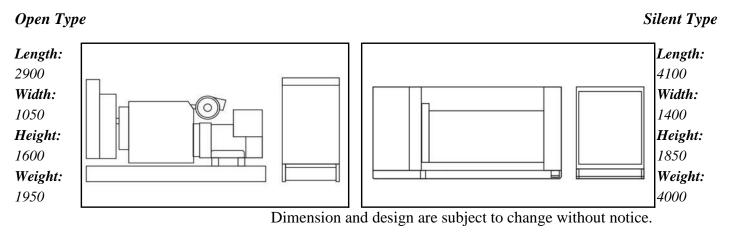

Warranty

The goods of POWERGEN System are under warranty against defects in materials and workmanship for a period of 12 months or 1000 hours whichever come first from the date of delivery to the end user (except the damageable spare parts of genset caused by incorrect man-made operation), and that the aforementioned warranty for the same token is back up by the engine & alternator manufactures and their global distributors.

Engine Specification



60HZ

General Performance		Lubrication System	
Manufacture	DOOSAN DAEWOO	Oil Pan Capacity (High - Low)	23 - 20 Litres
Engine Model	P126T	-	Pressure Feed Type
Engine Type	4 cycle, In-line, 6-cylinder		riven by Crankshaft
Engine Speed	1800 r.p.m	Oil Filter Full Fl	ow, Cartridge Type
Base Output Power	278kW/373Hp		
Standby Power	298kW/399Hp	Fuel System	
Governor Type	Electronic	Type Injection System	Direct Injection
Air Intake Way Turbocharge	d & Intercooled (air to air)	Fuel Consumption at 100% Standby pow	er 76.5 Litres/hour
Displacement	11.051L	Fuel Consumption at 100% Prime power	70.3 Litres/hour
Cylinder Bore * Stroke	123mm × 155mm	Fuel Consumption at 75% Prime power	52.3 Litres/hour
NO. of Cylinders	6	Fuel Consumption at 50% Prime power	36.2 Litres/hour
Compression Ratio	17:1	Fuel Consumption at 25% Prime power	20.3 Litres/hour
Compression Pressure A	Above 28kg/cm ² at 200rpm	Fuel Tank Capacity	
Rotation Counter clocky	wise viewed from flywheel	- Open Type Genset 6	Hours at Full Load
Firing order	1-5-3-6-2-4	- Silent Type Gensets	422 Litres
Injection Timing	16° BTDC		•
Max. permissible altitude	1500m	Cooling System	
		Water Flow	320Liters/min
Exhaust System		Coolant Capacity - Engine Only	19 Litres
Exhaust Gas Flow	58.1 m ³ /min	Standard Thermostat (Modulating) Range	71-85℃
Exhaust Gas Temperature	510 °C	Pressure System	Max. 0.5 kg/cm^2
Maximum Back Pressure	600 mmH2O	Cooling Method Fresh Water I	Forced Circulation
Exhaust Pipe Size	N/A		
		Electric System	
Air Intake System		Electrical System Voltage	24V
Recommended intake piping	size N/A	Battery	Maintenance-free
Maximum Intake Air Restrict	ion	Connecting Cables	Auailable
- Initial	220 mmH2O		
- Final	635 mmH2O	Thermal	
		Radiated Heat to Ambient	N/A
		Heat Rejection to Coolant	29 kcal/sec
		Heat Rejection to CAC	12 kcal/sec

Alternator Specification

General Data			60HZ/1800R.P.M
Manufacture / Brand	Leroy-somer	Prime Output Power	253kW/316kVA
Model	LSA46.2L9	Standby Output Power	278kW/348kVA
AVR Model	R250	Insulation class	Н
Coupling / Bearing	Direct / Single Bearing	Voltage regulation	$\pm 0,5$ %
Phase	3 Phase	Total harmonic (*) TGH / THCno	load<2.5%-on load<2.5%
Power Factor	$\cos \mathcal{C} = 0.8$	Wave form : NEMA = TIF - $(*)$	< 50
Winding pitch - Code	2/3 - (N° 6)	Wave form : I.E.C. = THF - $(*)$	< 2 %
Drip Proof	IP 23	Altitude	$\leq 1000 \text{ m}$
Excitation	Shunt	Overspeed	2250 min -1

POWERGEN comprehensive Easycon range control panels are compact, versatile and easy to use.

Easycon 2.0L/H (GU601A / Deepsea DSE3110) panel is a key-start auto control panel, it's a basic control panel fits for generators up to 100kVA to provide basic operating parameters display and protection.

Easycon 3.0 L/H (GU641B / Deepsea DSE7210) panel is an auto & digital control panel, it's an entry level control panel which provides full power monitoring and protection facilities. All operating parameters are with LCD display. (Auto Main Failure Version DSE7220 also Available.)



Easycon 4.0L/H (GU620A / Deepsea DSE7310) panel is an auto & digital & Remote control panel which includes all the features of Easycon 3.0, and plus data communication of full telemetry via the RS232/RS485 interfaces, CANBus is also included.

(Auto Main Failure Version DSE7320 also Available.)

Specifications

Specifical	ions			
		2	Over Speed pre-alarm & shutdown -	Auto Start -
			Low Oil Pressure Pre-Alarm & shutdown -	Oil Pressure -
	3	0	High Water Temp. Pre-alarm & shutdown -	Genset Running Hours -
4	•	L	Volts, Current, Frequency, Rpm (Instruments)-	Battery Voltage and Charging -
•	0	/	Fuel Sensor as optional -	
0	L	Н	AMF Module as optional -	
L	/		Digital Control Panel -	Switch Opening as Optional -
/	Н		Overcurrent Pre-alarm -	AMF Module as optional -
Н			Overcurrent Shutdown -	Power Factor -
			Prefix Start, Service Indicate, H	Fault History for Deepsea Module
	Remote Start (Data communication of full telemetry via the RS232/RS485) -			
				CANBus -

Options

Easycon 5.0H (Deepsea DSE8610) panel fits for Gen-Gen automatic Synchronising and load sharing.

Deepsea DSE7560 Synchronising Controller for Multi gen – Mains Synchronising. This is a separate control unit which enables multiple Easycon 5.0 equipped Gens to be synchronised with the Mains supply. Easycon 6.0H (Deepsea DSE8620) panel fits for Single Gen - Mains automatic Synchronising.

(For details specifications of Control Panels, please consult our sale department.)

Circuit Breaker

The generators are supplied together with a circuit breaker that permits a thermal protection against overloads and magnetic protection against short-circuit.

Automatic Transfer Switch

POWERGEN offers not only a changeover switch but also an integrated mains detection and switch system for your 24 Hour Power Protection. The system enables automatic start-up and operation of the generating set in the event of a mains power failure, overvoltage or loss of phase; and also mains automatic re-transfer once it come back.

ATS: Automatically transfer and re-transfer load from main power to gen-power without operator intervention. (Both Automatic and manual operation.)

Please consult our sales department for specifications.

Enclosure / Canopy

"Ensure a quieter life with our sound attenuation system." Features:

Extremely Rugged &	Security and Safety ▲Earth leakage protection		
Highly Corrosion ResistantConstruction			
▲Body made from 2.0mm sheet steel components	▲40-50mm non-inflammable sponge inside		
with powder coating	▲Control panel viewing window in a lockable access door		
▲8-12 hours built-in fuel tank integrated	▲Emergency stop button mounted on canopy exterior		
into the skid-mount base	▲Fuel fill and battery can only be reached via lockable		
▲Excellent design and craftmanship	access doors		
▲Zinc alloy with black powder coated	▲Exhaust silencing system enclosed for operator safety		
or Bright polished stainless steel hinges tested	▲Excellent cooling system to avoid high water temp.,		
and proven to withstand corrosive conditions.	reliable operation under harshest conditions.		
▲Compact structure and longer service life	▲(Ambient temp.upto 40-52°C and altitudes up to 1000M)		
Easy Commissioning and Maintenance	Transportability		
▲Separate & Standing control cabinet at one side,	▲Lifting points on baseframe		
quick fix electrical power connections.	▲Lifting shelf as optional		
▲Lube oil drain and radiator drain			
▲Side doors allowing 180° opening rotation	Quiet (Reduce Sound and Vibration)		
▲Radiator fill access through cover in canopy roof.	Noice Level:		
△Sockets as Optional	77-88dBA at 1m & 67-78dBA at 7m		

(Sound-attenuated & Weather Protective)





A.T.S - 4 Poles