



CUMMINS Engine: KT38-G Electronic Governor	Alternator Leroy-somer : LSA49.1M6	Generator Model:	TCM775X (Open)
	Optioanl: Stamford LVI634C Tide TPA354L8		TCM775XC (Silent)

60Hz 1800 r.p.m	3 Phase 4 Wires	Power Factor: Cos ϕ = 0.8	Emissions Certification:	N/A
---------------------------	---------------------------	--	---------------------------------	-----

RATINGS	Prime Power (PRP)		Standby Power (LTP)		Rated Current (A)
	kW	kVA	kW	kVA	Amps
Voltage (V)					
480/277	620	775	680	850	932.2
440/254	620	775	680	850	1017.0
416/240	620	775	680	850	1075.6
240/138	620	775	680	850	1864.4
220/127	620	775	680	850	2033.9

RATINGS:

All three Phase generator sets are rated at 0.8 power factor. All single-phase generator sets are rated at 0.8 or 1.0 power factor. **POWERGEN** reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Prime Power

Available continuously at variable load in lieu of commercially purchased power for an unlimited number of hours per year in accordance with ISO8528-1, and an overload of 10% permitted for one hour in every twelve hours of operation in accordance with ISO 3046-1.

Standby Power:

Emergency Standby Power in variable load applications in accordance with ISO8528-1 in the event of a utility power failure. No overload available for this service as relevant alternators are peak continuous rated at 27°C.

Standard Features

- ▲ High efficient water cooled diesel engine
- ▲ Brushless alternators (Class H, with AVR.)
- ▲ Heavy duty rubber anti-vibration mountings
- ▲ 12/24V starter batteries and connecting cables
- ▲ Separate engine-drive battery charging alternator
- ▲ Industrial silencer for open type generator sets
- ▲ Residential silencer for open type generator sets
- ▲ Auto start / Digital Easycon Control Panel
- ▲ Wiring with IEC standard
- ▲ Factory Test Certificate
- ▲ Operation & Maintenance Manual & Diagrams
- ▲ Worldwide Product / Technical Support
- ▲ Radiator with cap and drain point.
- ▲ Fully guarded engine driven fan
- ▲ No MCCB
- ▲ Oil filter - Diesel filter - Air filter
- ▲ Fully welded steel baseframe with lifting and fork-lifting facilities.
- ▲ Sound proof & Weather protective enclosures for silent type generator sets.


Optional

- △ Automatic Transfer Switch (ATS)
- △ Water - fuel separator
- △ Water heater for severe cold weather
- △ Lub-oil heater for severe cold weather
- △ 50°C-60°C Radiator
- △ Dual wall fuel tank base
- △ Fuel level sensor
- △ Maintenance free battery
- △ Additional CE Features Selection
- △ Extra air filters for time-maintenance
- △ Extra diesel filters for time-maintenance
- △ Extra oil filters for time-maintenance
- △ Separated standing fuel tank
- △ Low coolant level sensor
- △ Full range of attachments and options available for alternator
- △ ACB

Overall Dimensions(mm)& Weight(kg)


Open Type

Length:
4200
Width:
1700
Height:
2400
Weight:
7600

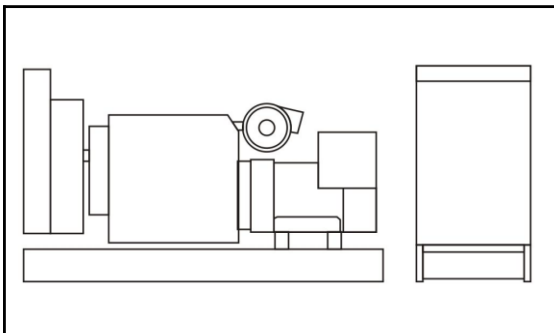

Silent Type

Length:
5900
Width:
2000
Height:
2500
Weight:
10050

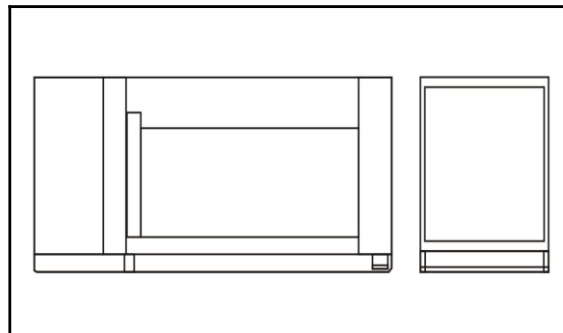

Dimension and design are subject to change without notice

Warranty

The goods of POWERGEN System are under warranty against defects in materials and workmanship for a period of 12 months or 1000 hours whichever comes first from the date of delivery to the end user (except the damageable spare parts of genset caused by incorrect man-made operation), and that the aforementioned warranty for the same token is back up by the engine & alternator manufactures and their global distributors.

EngineSpecification

60HZ

General Performance

Manufacture	CCEC Cummins
Engine Model	KT38-G
Engine Type	4 cycle, 60° Vee, 12-cylinder
Engine Speed	1800 r.p.m
Base Output Power	679kW/910hp
Standby Power	747kW/1000hp
Governor Type	Electronic
Air Intake Way	Turbocharged and Aftercooled
Displacement	37.8L
Cylinder Bore * Stroke	159mm × 159mm
NO. of Cylinders	12
Compression Ratio	15.5:1
Engine Idle Speed	725-775 r/min Fuel
Piston Speed	9.5 m/s
Intake Air Flow	991 Litres/sec.
Air Cleaner Type	Dry

Lubrication System

Oil Pan Capacity (High-Low)	114-87 Litres
Maximum Oil Temperature	121°C
Maximum Oil Consumption	N/A
Total System Capacity Including Bypass Filter	135 Litres

Fuel System

Type Injection System	Direct Injection Cummins PT
Fuel Consumption at 100% Standby power	173 Litres/hour
Fuel Consumption at 100% Prime power	154 Litres/hour
Fuel Consumption at 75% Prime power	118 Litres/hour
Fuel Consumption at 50% Prime power	84 Litres/hour
Fuel Consumption at 25% Prime power	50 Litres/hour
Tank Capacity	
- Open Type Genset	N/A
- Silent Type Gensets	N/A

Exhaust System

Exhaust Gas Flow	2813 Litres/sec.
Exhaust Gas Temperature	516-529°C Maximum
Maximum Back Pressure	76mm Hg
Exhaust Pipe Size	N/A

Cooling System

Coolant Capacity - Engine Only	111 Litres
Standard Thermostat (Modulating) Range	80 - 90°C
Maximum Top Tank Temperature	
- Standby Power	104°C
- Prime Power	100°C

Air Intake System

Recommended intake piping size	N/A
Maximum Intake Air Restriction	
- Dirty Element	635mm H ₂ O
- Clean Element	254mm H ₂ O

Electric System

Electrical System Voltage	24V
Battery	Maintenance-free
Connecting Cables	Available

Thermal

Radiated Heat to Ambient	147-162kW
Heat Rejection to Coolant	416-457kW
Heat Rejection to Exhaust	626-697kW

AlternatorSpecification

GeneralData

Manufacture / Brand	Leroy-somer
Model	LSA49.1M6
AVR Model	R450
Coupling / Bearing	Direct / Single Bearing
Phase	3 Phase
Power Factor	Cos ϕ = 0.8
Winding pitch - Code	2/3 - (N° 6)
Drip Proof	IP 23
Excitation	AREPorPMG

60HZ/1800R.P.M

Prime Output Power	624kW/780kVA
Standby Output Power	686kW/858kVA
Insulation class	H
Voltage regulation	± 0,5 %
Total harmonic TGH / THC	at no load<4%-on load<4%
Wave form : NEMA = TIF - (*)	< 50
Wave form : I.E.C. = THF - (*)	< 2 %
Altitude	≤ 1000 m
Overspeed	2250min-1

POWERGEN comprehensive Easycon range control panels are compact, versatile and easy to use.

Easycon 2.0L/H (GU601A / Deepsea DSE3110) panel is a key-start auto control panel, it’s a basic control panel fits for generators up to 100kVA to provide basic operating parameters display and protection.



Easycon 3.0 L/H (GU641B / Deepsea DSE7210) panel is an auto & digital control panel, it’s an entry level control panel which provides full power monitoring and protection facilities. All operating parameters are with LCD display. (Auto Main Failure Version DSE7220 also Available.)



Easycon 4.0L/H (GU620A / Deepsea DSE7310) panel is an auto & digital & Remote control panel which includes all the features of Easycon 3.0, and plus data communication of full telemetry via the RS232/RS485 interfaces, CANBus is also included. (Auto Main Failure Version DSE7320 also Available.)



Specifications

4 . 0 L / H	3 . 0 L / H	2	Over Speed pre-alarm & shutdown -	Auto Start
		0	Low Oil Pressure Pre-Alarm & shutdown -	Oil Pressure
4 . 0 L / H	3 . 0 L / H	L	High Water Temp. Pre-alarm & shutdown -	Genset Running Hours
		H	Volts, Current, Frequency, Rpm (Instruments)-	Battery Voltage and Charging
			Fuel Sensor as optional -	
			AMF Module as optional -	
			Digital Control Panel -	Switch Opening as Optional
			Overcurrent Pre-alarm -	AMF Module as optional
			Overcurrent Shutdown -	Power Factor
			Prefix Start, Service Indicate, Fault History for Deepsea Module.-	
			Remote Start (Data communication of full telemetry via the RS232/RS485)	
				CANBus

Options

Easycon 5.0H (Deepsea DSE8610) panel fits for Gen-Gen automatic Synchronising and load sharing.

Easycon 6.0H (Deepsea DSE8620) panel fits for Single Gen - Mains automatic Synchronising.

Deepsea DSE7560 Synchronising Controller for Multi gen – Mains Synchronising. This is a separate control unit which enables multiple Easycon 5.0 equipped Gens to be synchronised with the Mains supply.

(For details specifications of Control Panels please consult our sale department.)

CircuitBreaker

NoMCCB-(ACBasoptional)

The generators are supplied together with a circuit breaker that permits a thermal protection against overloads and magnetic protection against short-circuit.

AutomaticTransferSwitch

A.T.S-4Poles

POWERGEN offers not only a changeover switch but also an integrated mains detection and switch system for your 24 Hour Power Protection. The system enables automatic start-up and operation of the generating set in the event of a mains power failure, overvoltage or loss of phase; and also mains automatic re-transfer once it come back.

ATS: Automatically transfer and re-transfer load from main power to gen-power without operator intervention. (Both Automatic and manual operation.)

Please consult our sales department for specifications.



Enclosure/Canopy

(Sound-attenuated&WeatherProtective)

“Ensure a quieter life with our sound attenuation system.”

Features:

- ▲Earth leakage protection
- ▲40-50mm non-inflammable sponge inside
- ▲Control panel viewing window in a lockable access door
- ▲Emergency stop button mounted on canopy exterior
- ▲Fuel fill and battery can only be reached via lockable access doors
- ▲Exhaust silencing system enclosed for operator safety
- ▲Excellent cooling system to avoid high water temp., reliable operation under harshest conditions.
- ▲(Ambient temp.upto 40-52°C and altitudes up to 1000M)

EasyCommissioningandMaintenance

- ▲Separate & Standing control cabinet at one side, quick fix electrical power connections.
- ▲Lube oil drain and radiator drain
- ▲Side doors allowing 180°opening rotation
- ▲Radiator fill access through cover in canopy roof.
- △Sockets and Lifting shelf as Optional

Extremely Rugged & SecurityandSafety

HighlyCorrosionResistantConstruction

- ▲Body made from 2.0mm sheet steel components with powder coating
- ▲Excellent design and craftsmanship
- ▲Zinc alloy with black powder coated or Bright polished stainless steel hinges tested and proven to withstand corrosive conditions.
- ▲Compact structure and longer service life

Transportability

- ▲Lifting points on baseframe
- ▲Lifting shelf as optional

Quiet(ReduceSoundandVibration)

Noice Level:

77-88dBA at 1m & 67-78dBA at 7m